

GREASE DELIVERY

www.italcomsrl.com

**Heavy Duty...
Racing Experience!**



POMPE PNEUMATICHE PER GRASSO AIR OPERATED GREASE PUMPS


Pompe adatte al grassaggio di qualsiasi organo in movimento che necessiti lubrificazione. Possono erogare grassi sia fluidi che densi, purchè pompabili, a brevi ed a lunghe distanze. Affidabili, semplici da utilizzare, non necessitano praticamente di alcuna manutenzione.

Pumps suitable to grease any moving machine member needing lubrication. They can deliver both fluid or thick pumpable greases to short and long distases. Reliable, easy to use, they don't practically need any maintenance.

Dati tecnici/Tecnical data	10048	10074	10094	10052	10078	10098
Rapporto di Compressione Pump ratio	50:1	50:1	50:1	80:1	80:1	80:1
Pressione max di uscita grasso Max grease outlet pressure	400 5801	400 5801	400 5801	640 9282	640 9282	640 9282
Pressione di utilizzo Min/Max Operating pressure min/max	4-8 58-116 psi	4-8 58-116 psi	4-8 58-116 psi	4-8 58-116 psi	4-8 58-116 psi	4-8 58-116 psi
Portata (valore medio) Gr.1 Delivery	0,700 24,69 oz	0,700 24,69 oz	0,700 24,69 oz	0,700 24,69 oz	0,700 24,69 oz	0,700 24,69 oz
Lunghezza pescante Shank length	480 18,90 in	740 29,13 in	940 38,19 in	480 18,90 in	740 29,13 in	940 38,19 in
Diametro pescante Shank diameter	28 1,10 in	28 1,10 in	28 1,10 in	28 1,10 in	28 1,10 in	28 1,10 in
Raccordo entrata inlet connection	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"
Raccordo uscita outlet connection	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"
Per fusti da: For drums:	20-30 44/66 lb	50-60 110/132 lb	180-220 397/485 lb	20-30 44/66 lb	50-60 110/132 lb	180-220 397/485 lb

Pompa grasso R=80:1
lunghezza pescante 940 mm,
diametro pescante 28 mm,
per fusti 200 kg.

*Grease pump R=80:1
shank length
940 mm, (37,00 in)
shank diameter
28 mm, (1,10 in)
for drums 200 kg.
(441,00 lb)*

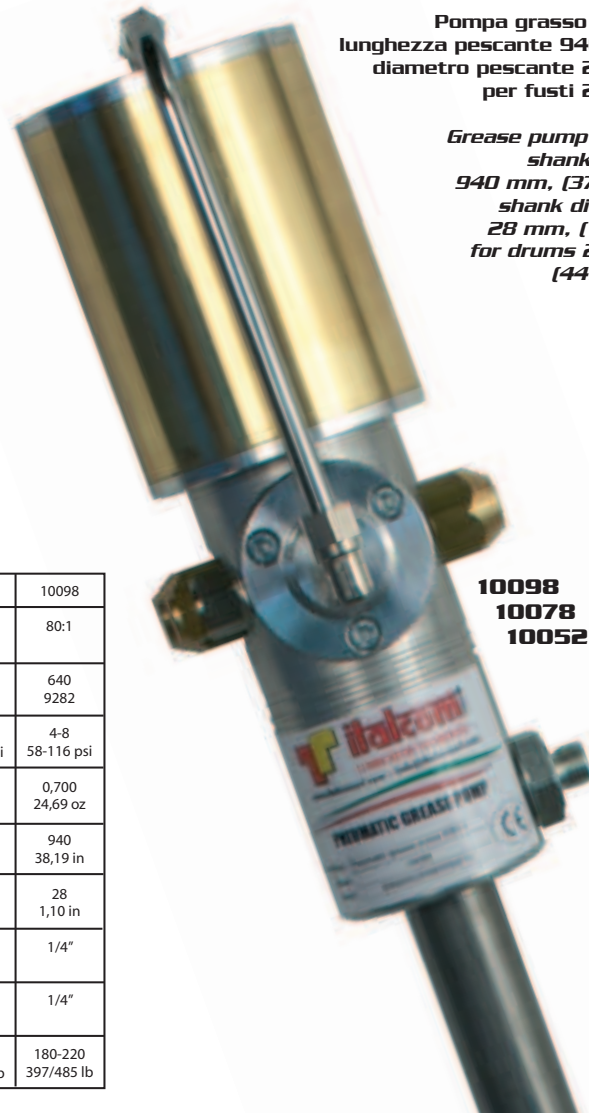

**10098
10078
10052**

10048



Pompa grasso R=50:1
Lunghezza pescante 480 mm,
diametro pescante 28 mm,
per fusti 20/30 kg.

*Grease pump R=50:1
shank length 480 mm, (18,90 in)
shank diameter 28 mm, (1,10 in)
for drums 20/30 kg. (44/66 lb)*

10074



Pompa grasso R=50:1
lunghezza pescante 740 mm,
diametro pescante 28 mm,
per fusti 50/60 kg.

*Grease pump R=50:1
shank length 740 mm, (29,13 in)
shank diameter 28 mm, (1,10 in)
for drums 50/60 kg. (110/132 lb)*

10094



Pompa grasso R=50:1
lunghezza pescante 940 mm,
diametro pescante 28 mm,
per fusti 200 kg.

*Grease pump R=50:1
shank length 940 mm, (37,00 in)
shank diameter 28 mm, (1,10 in)
for drums 200 kg. (441,00 lb)*

ACCESSORI PER POMPE GRASSO ACCESSORIES FOR GREASE PUMPS



COPRIFUSTO / DRUM COVER

11330
Coprifusto diametro 330 mm
bocchettone diametro 28 mm per fusti 20/30 kg.
Drum cover diameter 330 mm (13,00 in) central hole diameter 28 mm (1,10 in) for drums 20/30 kg. (44/66 lb)

11340
Coprifusto diametro 400 mm
bocchettone diametro 28 mm per fusti 50/60 kg.
Drum cover diameter 400 mm (15,75 in) central hole diameter 28 mm (1,10 in) for drums 50/60 kg. (110/132 lb)

11360
Coprifusto diametro 600 mm
bocchettone diametro 28 mm per fusti 200 kg.
Drum cover diameter 600 mm (23,62 in) central hole diameter 28 mm (1,10 in) for drums 200 kg. (441,00 lb)



MEMBRANA / FOLLOWER PLATE



12310
Membrana premigrasso diametro 310 mm
bocchettone diametro 28 mm per fusti 20/30 kg.
Follower plate diameter 310 mm (12,20 in) central hole 28 mm (1,10 in) for drums 20/30 kg. (44/66 lb)

12340
Membrana premigrasso diametro 400 mm
bocchettone diametro 28 mm per fusti 50/60 kg.
Follower plate diameter 400 mm (15,75 in) central hole 28 mm (1,10 in) for drums 50/60 kg. (110/132 lb)

12360
Membrana premigrasso diametro 600 mm
bocchettone diametro 28 mm per fusti 200 kg.
Follower plate diameter 600 mm (23,62 in) central hole 28 mm (1,10 in) for drums 200 kg. (441,00 lb)

13860



Pistola grasso con tubo uscita flessibile testina 4 griffe, completa di snodo singolo.

Grease guns with flexible delivery hose, 4 jaws grease fitting, complete with swivel joint.

13880



Pistola grasso con tubo rigido testina a 4 griffe, completa di snodo singolo.

Grease gun with metal outlet pipe 4 jaws grease fitting, complete with swivel joint.

13885



Tubo flessibile 400 mm. attacco 10x1 per pistole grasso.

Flexible hose 400 mm. (15,75 in) connection 10x1 for grease gun.

13890



Pistola contagrammi elettronica completa di testina 4 griffe e giunto triplo. Pressione di esercizio: max 550 bar Pressione di scoppio: min 1600 bar. Precisione di conteggio: ± 3%

Electronic grease gun complete with 4 jaws fitting and "2" swivel 1/1" mm. Operating pressure: (max) 550 bar. (7977 psi) Burst pressure: (min) 1600 bar. (23206 psi) Metering accuracy: ± 3%.

13912
13938



13912 Nipples 1/4" x 1/4" MM
13938 Nipples 1/4" x 1/2" MM

14000



Raccordo girevole 1/4" MM
Single swiveling joint 1/4" MM

14001



Snodo triplo 1/4" MM
"Z" swivel 1/4" MM

14002



Testina a 4 griffe
4 jaws grease fitting

